

Philips Bucky Tray



Bucky Tray for Standard / CR Cassettes and Cassette-sized Portable Detectors

Product Highlights

- For all basic applications: conventional cassettes and digital CR cassettes
- Improved workflow by quick and easy grid replacement
- Grid can be completely removed for pediatric applications
- Cassette sensing optional
- Quality manufactured in Germany
- Ergonomic design allowing single-hand operation, one hand is always on the patient
- Grid can be changed within seconds by operator

Technical Data

Philips Bucky Tray	
Interface exposure release	24 V
Sensing interface analogue	1 cm = 200 mV
Supply	24 V DC, I-peak 3,6 A (I-typical 200 mA)
Cassette all formats	Metric or inch from 13x18cm to 35x43cm, centric / eccentric position
Oscillating grid	Can be removed
Dimension	506 x 584 mm, Height 77 mm
Weight	16,3 kg

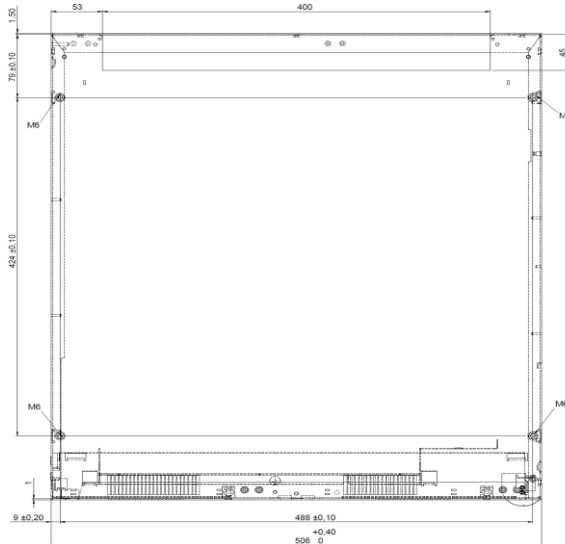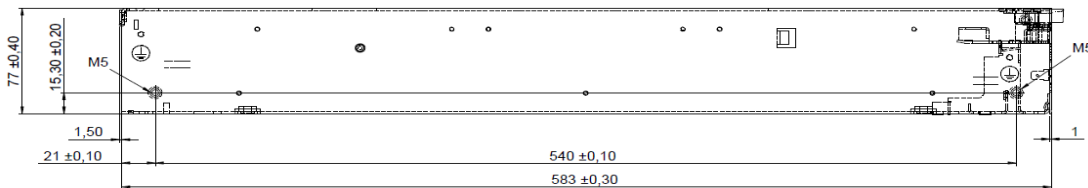

All rights are reserved. Reproduction in whole or parts is prohibited without the prior written consent of copyright holder.
X-Alliance reserves the right to make changes in specification and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

Distributed by:
X-Alliance GmbH
Suhrenkamp 59-69
22335 Hamburg - Germany
Tel: +49 40 600 88 44 0
Fax: +49 40 600 88 44 44
www.x-alliance.com
sales@x-alliance.com